



remont i prodaja opreme za kotlarnice Baždarenje ventila sigurnosti

Termoenergetik plus d.o.o. Zage Malivuk 65b, 11210 Krnjača Beograd PIB:SR103759831

t/f 011/2-993-992, 33-17-177, 065/34-30-627


termoenergetik@gmail.com

160-161458-23 170-30005764000-54

www.termoenergetik.com

RAVNI ZAPORNI VENTILI

Radni fluid: voda, para i neutralni gasovi.
Ugradne mere prema JUS MC5,005-F1 (DIN3202-F1)
Priključne mere prema JUS M,B6,064(DIN 2544)

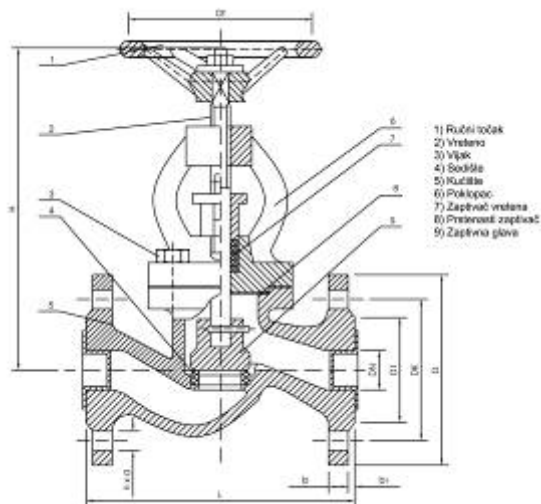

NP16 bara SL25

Radna temperatura: max 225°C

| DN mm | L mm | D mm | Dk mm | D1 mm | n x d | Težina kg |
|--------------|---------|---------|----------|----------|---------|--------------|
| NO15 | 130 | 95 | 65 | 45 | 4 x 14 | 3,50 |
| NO20 | 150 | 105 | 75 | 58 | 4 x 14 | 4,20 |
| NO25 | 160 | 115 | 85 | 68 | 4 x 14 | 5,00 |
| NO32 | 180 | 140 | 100 | 78 | 4 x 18 | 6,90 |
| NO40 | 200 | 150 | 110 | 88 | 4 x 18 | 9,00 |
| NO50 | 230 | 165 | 125 | 102 | 4 x 18 | 12,03 |
| NO65 | 290 | 185 | 145 | 122 | 4 x 18 | 17,40 |
| NO80 | 310 | 200 | 160 | 138 | 8 x 18 | 23,00 |
| NO100 | 350 | 220 | 180 | 158 | 8 x 18 | 33,30 |
| NO125 | 400 | 250 | 210 | 188 | 8 x 18 | 50,00 |
| NO150 | 480 | 285 | 240 | 212 | 8 x 23 | 77,00 |
| NO200 | 600 | 340 | 295 | 242 | 12 x 23 | 129,00 |
| NO250 | 730 | 405 | 355 | 268 | 12 x 27 | 230,00 |