



remont i prodaja opreme za kotlarnice Baždarenje ventila sigurnosti

Termoenergetik plus d.o.o. Zage Malivuk 65b, 11210 Krnjača Beograd PIB:SR103759831

t/f 011/2-993-992, 33-17-177, 065/34-30-627

termoenergetik@gmail.com


160-161458-23

170-30005764000-54

www.termoenergetik.com

HVATAČ NEČISTOĆE

Radni fluid: voda, para i neutralni gasovi.
Ugradne mere prema JUS MC5,005-F1 (DIN3202-F1)
Priključne mere prema JUS M,B6,064(DIN 2544)

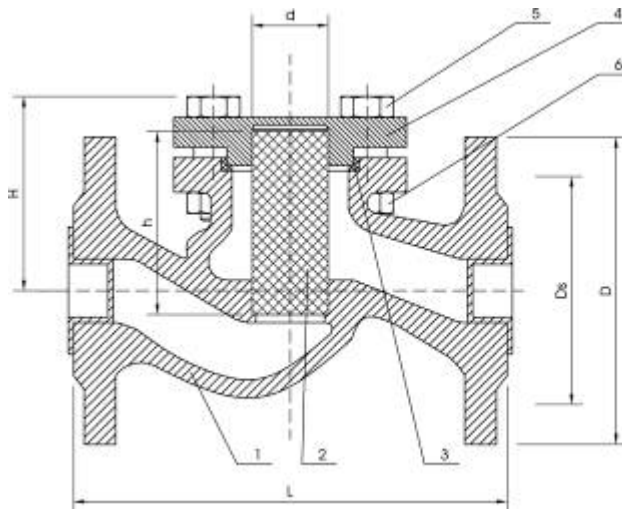

- 1) Kućište
- 2) Sito
- 3) Zaptivač
- 4) Poklopac
- 5) Vijak
- 6) Navrtka

NP16 bara SL25

Radna temperatura: max 225°C

DN mm	L mm	D mm	Ds mm	D1 mm	n x d	Težina kg
NO15	130	95	65	45	4 x 14	2,20
NO20	150	105	75	58	4 x 14	2,60
NO25	160	115	85	68	4 x 14	3,90
NO32	180	140	100	78	4 x 18	4,70
NO40	200	150	110	88	4 x 18	6,30
NO50	230	165	125	102	4 x 18	8,00
NO65	290	185	145	122	4 x 18	11,60
NO80	310	200	160	138	8 x 18	18,10
NO100	350	220	180	158	8 x 18	25,80
NO125	400	250	210	188	8 x 18	42,50
NO150	480	285	240	212	8 x 23	63,50
NO200	600	340	295	242	12 x 23	
NO250	730	405	355	268	12 x 27	