



## remont i prodaja opreme za kotlarnice Baždarenje ventila sigurnosti

Termoenergetik plus d.o.o. Zage Malivuk 65b, 11210 Krnjača Beograd PIB:SR103759831

t/f 011/2-993-992, 33-17-177, 065/34-30-627

termoenergetik@gmail.com


160-161458-23

170-30005764000-54

www.termoenergetik.com

### RAVNI ZAPORNI VENTILI

Radni fluid: voda, para i neutralni gasovi.  
Ugradne mere prema JUS MC5,005-F1 (DIN3202-F1)  
Priključne mere prema JUS M,B6,064(DIN 2544)

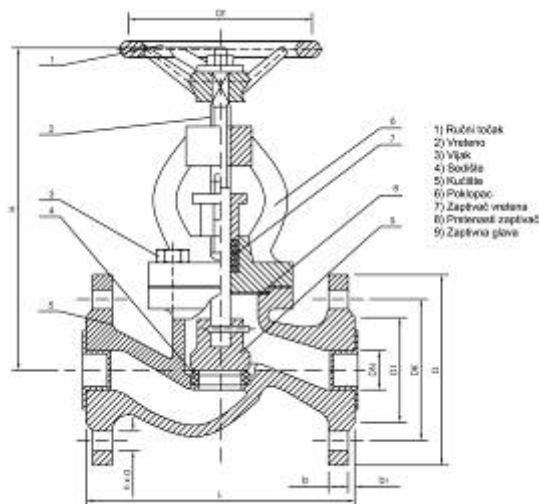

**NP25/40** bara Č1330 (GS-C25)

Radna temperatura do 400°C

| DN mm | L mm | D mm    | Dk mm   | D1 mm   | n x d      | Težina kg |
|-------|------|---------|---------|---------|------------|-----------|
| NO15  | 130  | 95      | 65      | 45      | 4 x 14     | 4,70      |
| NO20  | 150  | 105     | 75      | 58      | 4 x 14     | 5,40      |
| NO25  | 160  | 115     | 85      | 68      | 4 x 14     | 6,20      |
| NO32  | 180  | 140     | 100     | 78      | 4 x 18     | 9,50      |
| NO40  | 200  | 150     | 110     | 88      | 4 x 18     | 11,20     |
| NO50  | 230  | 165     | 125     | 102     | 4 x 18     | 15,00     |
| NO65  | 290  | 185     | 145     | 122     | 8 x 18     | 21,00     |
| NO80  | 310  | 200     | 160     | 138     | 8 x 18     | 34,00     |
| NO100 | 350  | 235     | 190     | 162     | 8 x 22     | 49,00     |
| NO125 | 400  | 270     | 220     | 188     | 8 x 26     | 70,00     |
| NO150 | 480  | 300     | 250     | 218     | 8 x 26     | 96,00     |
| NO200 | 600  | 360/375 | 310/320 | 278/285 | 12 x 27/30 |           |
| NO250 | 730  | 425/460 | 370/385 | 335/345 | 12 x 30/33 |           |